


# The PurpleSeal Bridge Plug

*Premium design and high performance at a great price*

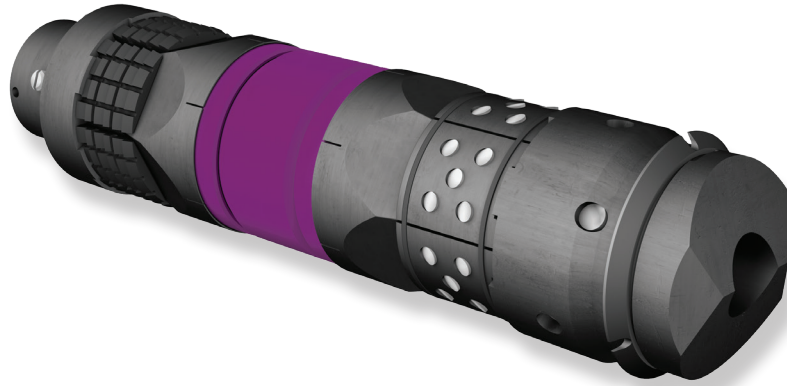

The PurpleSeal™ Bridge Plug is a hybrid-slip “kill” plug that provides temporary wellhead isolation from the zones below after a frac. The plug contains a cast-iron upper slip and powdered-metal buttons in the lower slip. The plug is rated to 10,000 psi from above and 8,000 psi below. Proprietary high-strength composite materials ensure uniform performance and durability at temperatures up to 200° F. Interlocking castellations on the slips and end caps and a contoured interface between the slips and cones eliminate component rotation to ensure even, concentric slip expansion. The plug ID is sealed by a trapped composite component that is drilled out prior to the upper slips to equalize pressure.

## Features and Benefits

- Provides temporary isolation from both above and below the plug
- Pressure equalization across plug prior to drilling out upper slip
- Cast-iron upper slip to prevent plug movement uphole
- Composite lower slip with powdered-metal buttons
- Conventional 90-80-90 duro packing elements with additional anti-extrusion support on both ends
- Anti-preset features in both the plug and wireline adapter kit
- Available with the PurpleSeal Express™ single-use, disposable setting tool
- Can also be deployed on all conventional setting tools

Casing Size in.	Casing Weight lb/ft	Pressure Rating from above psi	Pressure Rating from below psi	Plug OD in.	Plug OAL in.	Part Number
4.50	13.5 - 15.1	10,000	8,000	3.600	17.37	0025200
5.000	18.0	10,000	8,000	3.850	17.56	0029358
5.500	20.0 - 23.0	10,000	8,000	4.380	18.82	0022502



**REPEAT PRECISION**

[repeatprecision.com](http://repeatprecision.com)

**W. Grant Martin**  
 President  
 432.352.3434

**John Billings**  
 Permian Basin  
 940.249.2219

**Adam Curry**  
 Appalachia Region  
 724.882.9816

**Todd Draeger**  
 Rocky Mountains Region  
 970.380.8633